

# CHEMETRON Fire Systems™ Gamma Series Systems with 3M™ NOVEC™ 1230 Fire Protection Fluid

## GENERAL INFORMATION

The Chemetron Fire Systems Gamma Series Systems are automatic suppression systems using 3M™ Novec™ 1230 Fire Protection Fluid and consisting of four basic components and their associated accessories.

- System Components
- Control Panels
- Detection and Alarm Devices
- Completer Kits

### Features

- 1** The system components consist of agent containers, container supports (racks), and discharge nozzles.
- 2** The control panel is the brains of the system and is used to monitor the detection and accessories.
- 3** The detection, alarm devices, and accessories are the external devices that act as the eyes and voice of the system as they give audible or visual signals.
- 4** The completer kits consist of warning signs, hoses, connection fittings, pressure gauges or solenoid valves, and the actuator required to operate the cylinder valve.

The system and its components are agency tested for total flooding applications and should be used in accordance with the guidelines contained in National Fire Protection Association 2001. A total flooding application can be defined as injecting Novec 1230 fluid into an enclosure or volume having the structural integrity to retain the agent during and after discharge. The design of such a system requires that the Novec 1230 fluid be discharged from its container in between a minimum of 5 and a maximum of 10 seconds and be thoroughly mixed throughout the protected volume, reaching a minimum concentration level of 4.2%, but not exceeding 10% in normally occupied spaces.



## GAMMA SERIES SYSTEM EQUIPMENT DESCRIPTION

The Gamma System permits higher discharge rates and is particularly adaptable to areas requiring larger quantities of Novec 1230 fluid. A description of the various equipment components unique to the Gamma System follows.


### Cylinder and Valve Assembly

Gamma Series cylinders are available in four different capacities and are charged with Novec 1230 fluid to a filling density up to 70 lb/ft<sup>3</sup> (1121 kg/m<sup>3</sup>) of cylinder volume. All cylinders are superpressurized with dry nitrogen to a pressure of 360 psig (2482 kPa), at 70°F (21°C). Each cylinder is equipped with an identification nameplate indicating the quantity of Novec 1230 fluid.


The standard cylinder assembly, having a rigid dip tube, is designed for mounting in a vertical position only. The cylinder assembly is composed of a cylinder, dip tube, and cylinder valve.

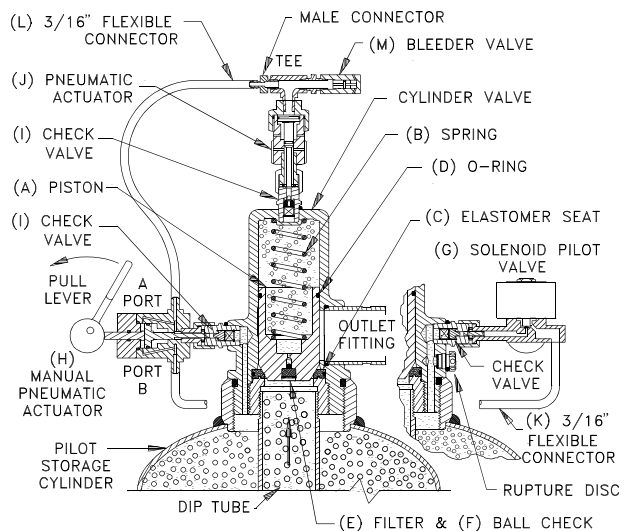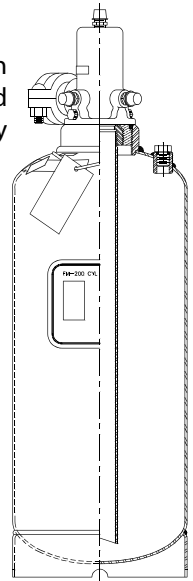

**CYLINDER VALVE - STANDBY MODE**

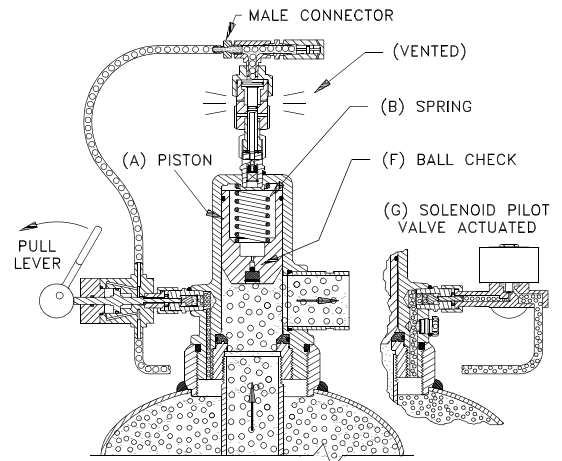

**CYLINDER VALVE - ACTUATED MODE**

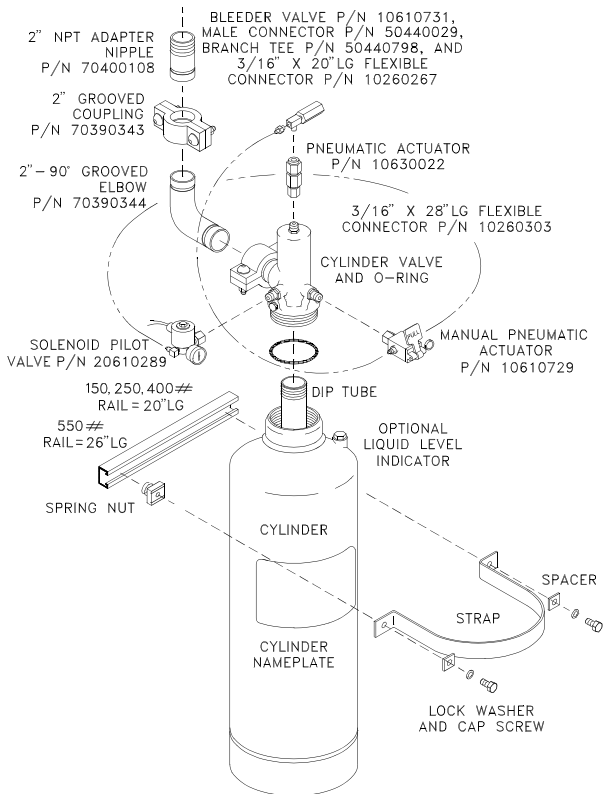

**Gamma Series Cylinder Assembly  
with Completer Kit and Mounting Bracket**

Cylinder	Stock Number	Fill Capacity			
		Minimum		Maximum	
		lbs	kg	lb	kg
150 lb.	10481822	82	37.2	163	73.9
With LLI	10481823				
250 lb.	10481824	138	62.6	274	124.3
With LLI	10481825				
400 lb.	10481826	211	95.7	421	191.0
With LLI	10481827				
550 lb.	10481828	282	127.9	500	226.8
With LLI	10481829				

**A Cylinder:** The welded seam steel cylinders are manufactured to the requirements of the Department of Transportation (DOT) for compressed gas and have internal neck threads for cylinder valve connection.

**B Dip Tube:** A threaded dip tube extends from the cylinder valve down to within approximately 1-1/2 in. (38 mm) of the bottom of the cylinder.

**C Cylinder Valve:** A pressure differential type cylinder valve having a forged brass body is attached to the cylinder neck and serves to control the flow of Novec 1230 fluid from the cylinder. The valve is secured to the cylinder by means of 4.5-12UN-2A screw threads and is sealed by a cylinder O-ring. A synthetic rubber seat is attached to a steel seat retainer, which is screwed into the bottom of the valve. The seat retainer also supports the dip tube.

The cylinder valve has six connections, as follows:

**1 Manual-Pneumatic Actuator Connection:** This is a threaded connection housing a check valve and serves as the attachment point for the manual-pneumatic actuator.

**2 Pressure Gauge/Solenoid Pilot Valve Assembly Connection:** This is a threaded connection housing a check valve and serves for the attachment of:

- Solenoid pilot valve assembly (with pressure gauge) for pilot cylinders.
- Pressure gauge assembly for all other system cylinders.

**3 Pneumatic Actuator Connection:** This is a threaded connection housing a check valve located on top of the cylinder valve. It serves as an attachment point for the pneumatic actuators.

**4 Safety Disc Connection:** Two frangible safety discs are located on opposite sides and serve to protect the cylinder against excessive internal pressure. The discs are designed to burst in a range of 850 psi to 1000 psi (5860 kPa to 6895 Kpa).

**5 Discharge Connection:** This connection (2 in. nominal pipe size) (51 mm) is in the form of an outlet fitting that threads into the valve body and is sealed with an O-ring. The exposed end is grooved for attachment of grooved fittings (Victualic, etc.). The outlet fitting can be removed for replacement if necessary.

## COMPLETER KIT

Either a primary or slave completer kit is required to complete the installation of each Novec 1230 fluid filled cylinder. The components included in the primary and slave completer kits are detailed in the following chart.


Description	Completer Kits	
	Primary 20480784	Slave 20480785
	Quantity	Quantity
Solenoid valve	1	0
Solenoid valve w/Supervisory Pressure Switch	1*	0
Pneumatic actuator	1	1
Manual-pneumatic actuator	1	0
1/4" Bleeder valve	1	0
3/16" flex hose 20" long	1	0
3/16" flex hose 28" long	1	1
2" 90° Elbow, grooved	1	1
2" Coupling, grooved	1	1
2" Adapter nipple	1	1
Tee, 1/4" F x 1/4" F x 1/4" M	1	0
Tee, 1/4" FL x 1/4" FL x 1/4" MNPT	0	1
1/4" Male connector	1	0
Pressure gauge	0	1
Pressure gauge w/Supervisory Pressure Switch	0	1*
Warning sign	1	0
Operating instruction nameplate	1	0
* Items are part of the Primary (S/N 20480786) and Slave (S/N 20480787) Completer Kits with Supervisory Pressure Switch		
If cylinders are used in a Main/Reserve system, order decals: Main Decal - S/N 50360753    Reserve Decal - S/N 50360752		

**Solenoid Pilot Valve Assembly**

The system utilizes a solenoid pilot valve assembly to provide pilot pressure for actuation. The solenoid must be electrically supervised by a recognized fire suppression system control panel.


The solenoid pilot valve assembly includes a pressure gauge and adapter with swivel nut, elbow, and O-ring seal that is attached to the pressure gauge connection of the cylinder valve.

Stock Number	Description
20610289	Solenoid pilot valve assembly 120V-60Hz/24VDC
20610308	Explosionproof Solenoid pilot valve assembly 24 VDC
20610290	Solenoid pilot valve assembly with supervisory pressure switch 120V-60Hz/24VDC

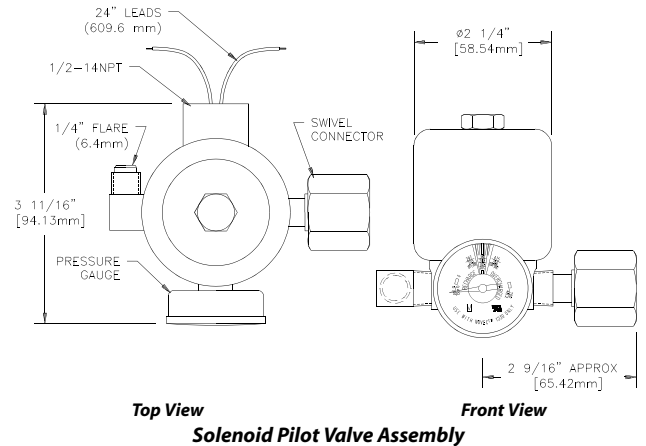


**Manual-Pneumatic Actuator - S/N 10610729**

This device is required for the manual actuation of a cylinder and is attached to a check valve connection port. This is a dual purpose device, having an actuating piston connected to a pin to upset the fill check valve when pilot pressure is applied to the piston. With the check valve open, cylinder pressure is applied through the pilot connection to the piston of the pneumatic actuator, thereby opening the cylinder to discharge its contents.

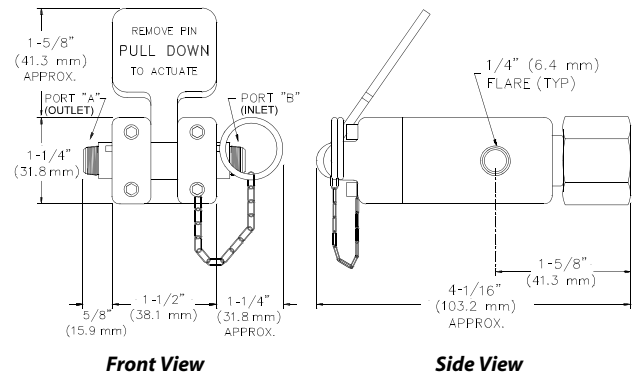


**Pneumatic Actuator - S/N 10630022**

The pneumatic actuator has a piston connected to a probe to upset the connection check valve when pilot pressure is applied to the piston. With the check valve open, pressure above the piston of the cylinder valve is rapidly vented to atmosphere, thereby causing the cylinder valve to open.

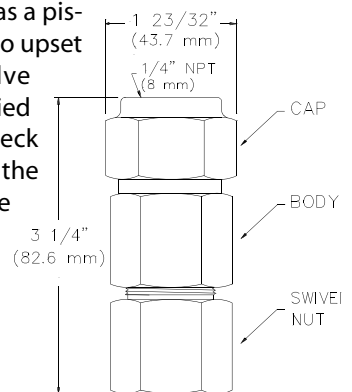


**Bleeder Valve - S/N 10610731**

A bleeder valve is used in the pilot line to prevent accumulation of pressure due to accidental leakage through a solenoid pilot valve assembly, which, if unvented, could cause a false discharge of the system.

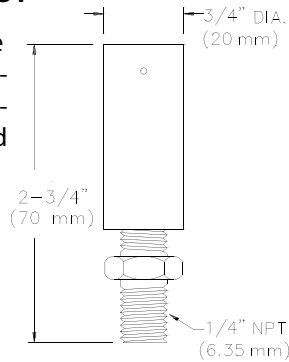


**Discharge Connection Fittings - S/N 20710212**

A 2 in. (50 mm) grooved elbow, nipple, and companion coupling and gasket are used to extend the discharge outlet fitting of the cylinder valve to the piping system. These fittings ease assembly and accommodate some minor differences in alignment.

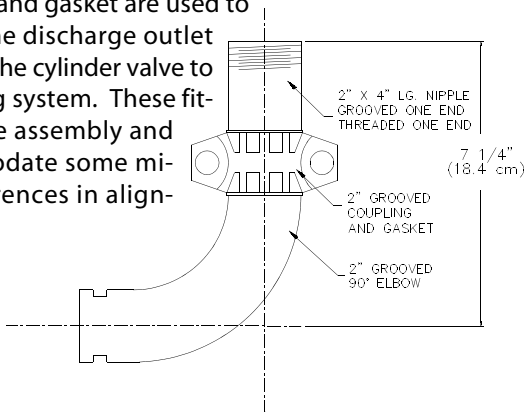

**Flexible Connector**


Lengths of 3/16 in. (5 mm) flexible connectors are used to interconnect the cylinder valve devices. These hoses have a stainless steel wire braid cover and a Teflon liner, and are fitted at each end with a 1/4 in. swivel flare nut.

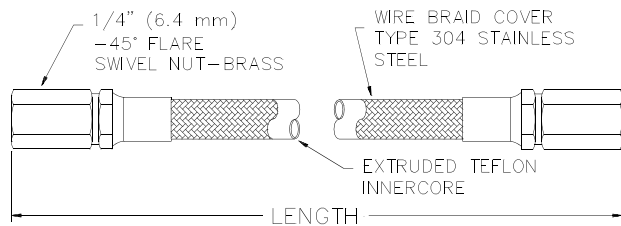

Stock Number	Description
10260260	3/16 in. (5 mm) Connector 16 in. (40.6 cm) long
10260267	3/16 in. (5 mm) Connector 20 in. (50.8 cm) long
10260303	3/16 in. (5 mm) Connector 28 in. (71.1 cm) long

**Pressure Gauge Assembly**

In systems requiring more than one cylinder, a pressure gauge assembly is required for each cylinder other than the pilot cylinder as a means of visual surveillance of the pressure condition within the cylinder.

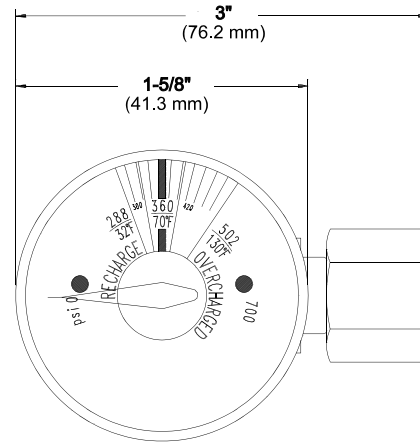


Pressure Gauge

Stock Number	Description
20240048	Pressure Gauge Assembly
20610049	Pressure Gauge Assembly w/supervisory pressure switch

**OPTIONAL EQUIPMENT**

**Pressure Switch**

A pressure switch is used in the system to implement the shut down of power and various items of equipment, such as fans; and for annunciation and alarm purposes.

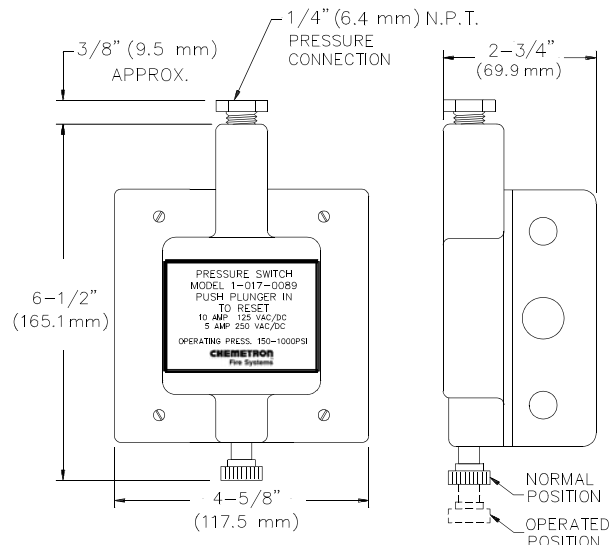


# CHEMETRON Fire Systems™ Gamma Series Systems with 3M™ NOVEC™ 1230 Fire Protection Fluid

Stock Number	Description
10170089	2 Pole Pressure Switch <i>indoor use only</i>
70170229	Explosionproof 2 Pole Pressure Switch
10170065	4 Pole Pressure Switch <i>weatherproof</i>

## Check Valve - S/N 70610499

A check valve is used between the cylinder valve discharge outlet flexible connection and the discharge manifold. The check valve prevents back flow from the manifold in the event that the system is discharged when one or more cylinders are disconnected, such as for weighing or general servicing. A check valve is not required on single cylinder systems.

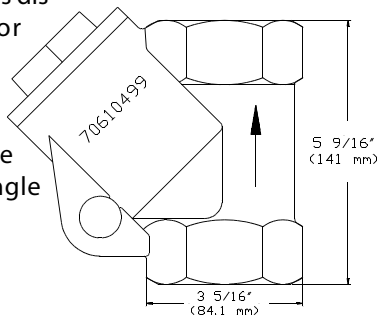

## CYLINDER RACK


### Single/Multiple Cylinders, Vertically Mounted

150, 250 & 400 lb - S/N 20710229  
550 lb - S/N 20710264

The cylinder rack, consisting of a rail, a strap, and miscellaneous hardware for interconnection, is shipped unassembled. The rail is provided with 1-1/8 in. (2.85 cm) slots on 2 in. (5.0 cm) centers for mounting bolts.


Stock Number	Nominal Cylinder Size	Dimension			
		A		B	
		in	cm	in	cm
10481822	150 lb.	28	71.1	16	40.6
10481824	250 lb.	42-3/8	107.6	26	66.0
10411826	400 lb.	61-5/8	156.5	38-1/2	97.8
10481828	550 lb.	46-3/8	117.8	33	83.8

Stock Number	Empty Cylinder Weight Lb (Kg)	Cylinder Assembly Dimensions			
		Height		Diameter	
		in	cm	in	cm
10481822	177 (80)	34 3/8	87.3	16	40.6
10481824	213 (97)	48 3/4	123.8	16	40.6
10481826	279 (126)	68	172.7	16	40.6
10481828	347 (157)	52 3/4	134.0	22	55.9

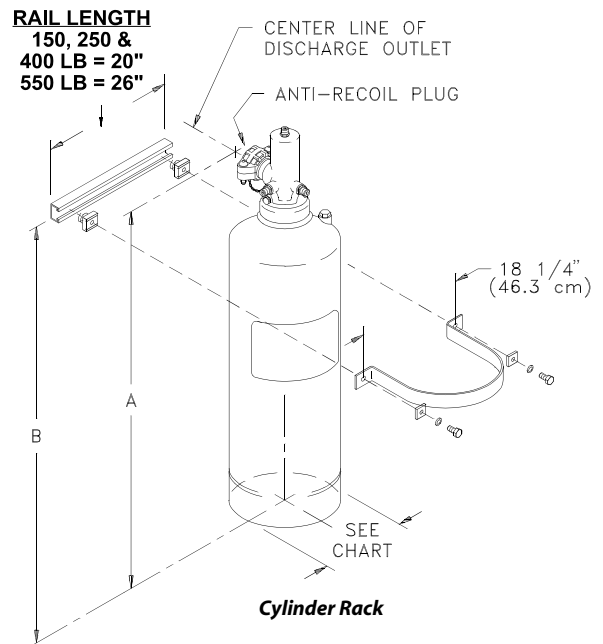


## NOZZLES

Nozzles (8 port) are used to control the flow of Novec 1230 fluid to insure it is discharged in between a minimum of 5 and a maximum of 10 seconds and properly distributed in the protected hazard.

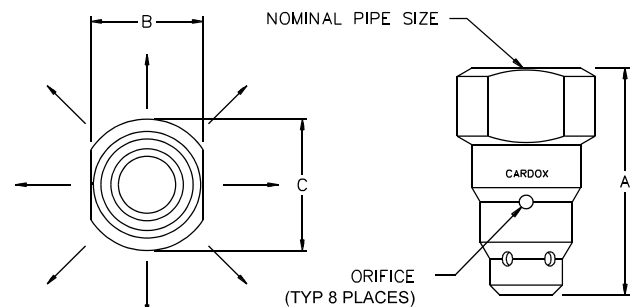

360 Degree Radial Nozzle for use with Novec 1230 fluid

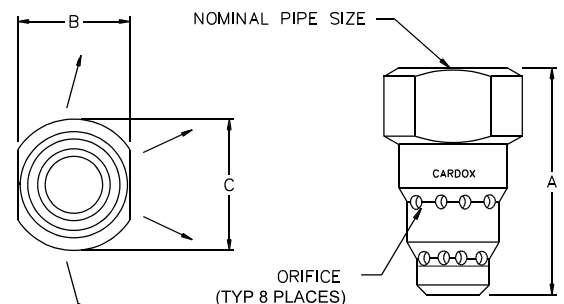

180 Degree Sidewall Nozzle for use with Novec 1230 fluid

# CHEMETRON™ Fire Systems™ Gamma Series Systems with 3M™ NOVEC™ 1230 Fire Protection Fluid

Stock Number		Nominal Pipe Size	Nozzle Height	
			A	
Stainless	Brass		in	mm
<b>360° Radial Nozzle</b>				
10371360	10371415	3/8 in (10 mm)	2.031	51.6
10371361	10371416	1/2 in (13 mm)	2.250	57.2
10371362	10371417	3/4 in (19 mm)	2.688	68.3
10371363	10371418	1 in (25 mm)	2.875	73.0
10371364	10371419	1-1/4 in (32 mm)	3.250	82.6
10371365	10371420	1-1/2 in (38 mm)	3.625	92.1
10371366	10371421	2 in (51 mm)	4.500	114.3
<b>180° Sidewall Nozzle</b>				
10371452	10371438	3/8 in (10 mm)	2.031	51.6
10371453	10371439	1/2 in (13 mm)	2.250	57.2
10371454	10371440	3/4 in (19 mm)	2.688	68.3
10371455	10371441	1 in (25 mm)	2.875	73.0
10371456	10371442	1-1/4 in (32 mm)	3.250	82.6
10371457	10371443	1-1/2 in (38 mm)	3.625	92.1
10371458	10371444	2 in (51 mm)	4.500	114.3

## PHYSICAL/CHEMICAL PROPERTIES

Novec 1230 fluid [(CF<sub>3</sub>CF<sub>2</sub>C(O)CF(CF<sub>3</sub>)<sub>2</sub>)] is a compound that consists of carbon, fluorine and oxygen. It is colorless, odorless, electrically non-conductive, and suppresses fire by interrupting the combustion process and affecting the available oxygen content in the area of the discharge.

Novec 1230 fluid is clean, efficient, listed as "acceptable" by the U.S. Environmental Protection Agency (EPA), and leaves no residue, thus minimizing any downtime after a fire.

If exposed to temperatures greater than 1067°F (575°C), toxic products of decomposition (hydrogen fluoride) are formed. The system should be designed to discharge between a minimum discharge time of 5 seconds and a maximum discharge time of 10 seconds. The amount of toxic byproducts formed during extinguishment of flames is greatly reduced by discharging the agent in less than 10 seconds. Most materials contained in areas protected by Novec 1230 fluid, such as aluminum, brass, rubber, plastics, steel, and electronic components, are unaffected when exposed to Novec 1230 fluid.

Novec 1230 fluid is stored as a liquid in steel containers and superpressurized with nitrogen to 360 psig (2482 kPa) to increase its discharge flow characteristics. When discharged, Novec 1230 fluid will vaporize at the discharge nozzles and effectively mix with the air throughout the protected area.

## SAFETY CONSIDERATIONS

In accordance with NFPA Standard 2001 and the EPA Significant New Alternative Program (SNAP), personnel exposure to total flooding system concentrations of Novec 1230 fluid shall be limited to the following:

The discharge of Novec 1230 fluid into a hazard may cause a reduction in visibility for a brief period. Any direct contact with the agent can cause frostbite.

A cylinder containing Novec 1230 fluid should be carefully handled. **All anti-recoil devices must be in place at all times when the cylinder is not restrained.**

The Material Safety Data Sheet (MSDS) covering Novec 1230 fluid should be read and understood prior to working with the agent.

Concentration Level	Exposure Restriction
10% or below (current NOAEL)	No restriction
Greater than 10% (current LOAEL)	Avoid any exposure

The seller makes no warranties, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, except as expressly stated in seller's sales contract or sales acknowledgment form. Every attempt is made to keep our product information up-to-date and accurate. All specific applications cannot be covered, nor can all requirements be anticipated. All specifications are subject to change without notice.

**CHEMETRON™**  
Fire Systems™  
*A World of Protection*



4801 Southwick Drive  
Third Floor  
Matteson, IL 60443  
708/748-1503 • FAX 708/748-2847