

Gas monitoring systems

**Innovative gas monitoring and control systems for
saving energy in Underground Car Parks**



KIMESSA AG
Gas monitoring systems



Rautstrasse 12 • CH-8047 Zuerich • Switzerland • T +41 (0)44 404 38 38 • F +41 (0)44 404 38 39
info@kimessa.com • www.kimessa.com

KIMESSA AG

KIMESSA AG was established in 1985 as an innovator in the design and manufacture of electronic fixed gas detection solutions.

KIMESSA AG specialises in fixed gas monitoring and control systems, with customers drawn from industries including underground car parks, HVAC, laboratories, refrigeration, food and brewing.

KIMESSA AG has achieved worldwide notable success with their acclaimed carbon monoxide monitoring and control equipment in the underground car park market, designed to compliment specialist ventilation systems with some of the world's leading companies in this field.


All of our products are developed and manufactured in Switzerland. 50% of our output is exported through an experienced distributor network.

Certified to ISO 9001:2000 in 2004, KIMESSA AG proves they are committed to meeting their customers demand for robust, high quality and innovative products.



Facts

- Swiss quality engineered products
- Free consulting and project design
- Proven competent and co-operative worldwide customer service
- Maintenance provided by dedicated and motivated personnel
- KIMESSA is committed to develop and innovate while maintaining a strict QC protocol combined with rigorous functional tests on each product
- KIMESSA Gas detection solutions represent 24 years experience in the market
- For more information, please consult our website or a distributor near you. www.kimessa.com

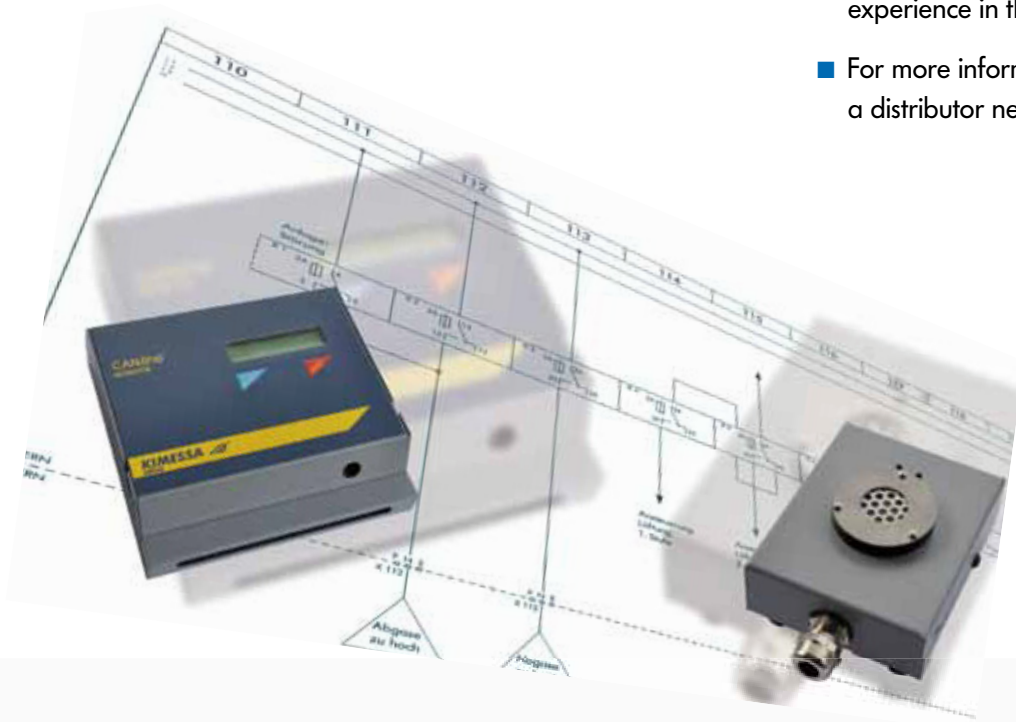

Field of application


Today's society daily lives and works with poisonous, flammable and inert gases. Gas is an economical, functional and essential commodity, but one which can become dangerous if used or released in a non-controlled manner.

Intensive research and development have led to the production of the compact KIMESSA gas monitoring system for industrial and domestic applications. With the *DUOline* and *CANline* control units, and an extensive variety of Gas Detectors, KIMESSA is helping to prevent accidents and damage to people, homes and the workplace. A gas monitoring system also actively promotes energy saving by monitoring and controlling the use of gas.

Thanks to the superior technical solutions they offer, KIMESSA gas monitoring systems are versatile, of high quality and extremely cost-efficient.

KIMESSA products are subject to stringent quality control and are manufactured using innovative production and testing techniques.

To realise an effective gas monitoring system in your plans, contact KIMESSA or their trained representatives and take the opportunity to benefit from their experience.

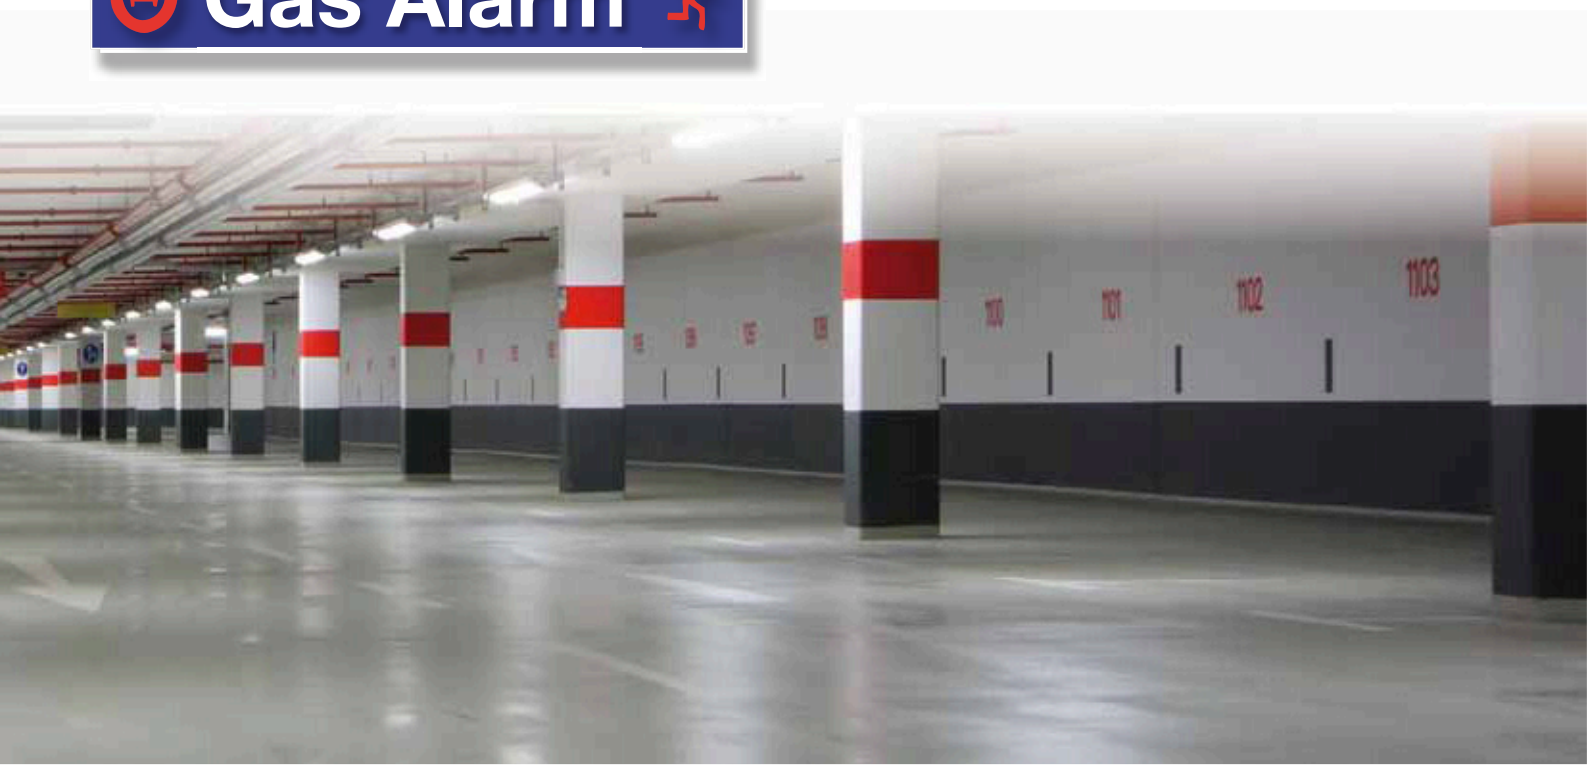

BUS Gas Detection systems for Underground Car Parks

Carbon Monoxide detection systems with CANline BUS system

Carbon Monoxide gas monitoring and ventilation systems are essential equipment in most underground car parking facilities where natural ventilation is inadequate. Likewise in tunnels and vehicle test centres where carbon monoxide can pose a major risk to human health. Energy saving through regulation of ventilation systems, security and air quality are major economic and environmental considerations.

The newly developed CANline control unit, with its innovative technology, offers a dedicated multifunctional approach to regulating and controlling ventilation equipment. Utilising reliable electrochemical sensor technology, a number of digital BUS CO Detectors may be zoned to measure CO and control ventilation. In this way, energy costs can be streamlined while operating effective air quality control.

Positioning of CO Gas Detectors

We can consider the following locations for the positioning of CO gas monitors

- Exits & entrances
- Vehicle roadways
- Pedestrian entrances
- Attended work stations

Gas Detectors may be mounted at ceiling height or at head height where ceilings are high.

Warning messages can be displayed on illuminated remote display boards when CO levels exceed recommended national exposure limits.


As the Gas Detectors are installed on an addressable looped BUS, installation costs are minimised with the CANline system.

Dangerous NO_x emissions from diesel engines can also be monitored with new BUS NO₂ Gas Detectors.

As an option, the CANline remote display can be mounted in manned stations to indicate gas concentrations, alarm status and Detector location by parking space number.




BUS-Wiring, max. 32 BUS-Detectors may be connected

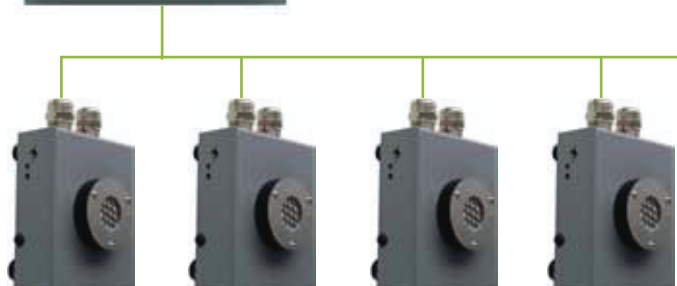

Up to 32 BUS-Detectors can be connected to a CANline



Along with the connection of BUS-Detectors it is also possible to connect non-BUS Detectors (gas, temperature, etc) with a 4...20mA-output signal to a CANline monitor.

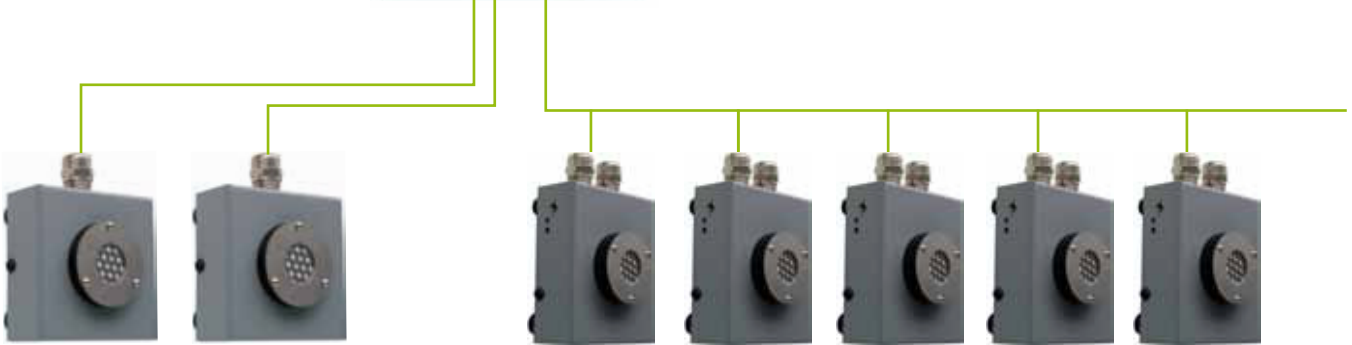

2 x 4...20mA-Detectors Type KSS 532, for detection of Freon

30 BUS-Detectors loop connected



With the optional CANline-Connection box it is also possible to integrate a 4...20mA-Detector into a CANline BUS system



30 BUS-Detectors loop connected

1 BUS-Detector

CANline-Connection box

4-20mA Gas Detector GSP 121 Ex


- Energy optimisation and protection against health risk
- Installation cost saving
- PC based real-time CO monitoring and data-logging

CANline Control unit

- The CANline control unit displays gas concentrations measured and controls the devices connected to it. We can connect up to 32 detectors, remote displays and a maximum of 6 relay cards to the BUS network.
- The SELECT button can be used for selecting several modes of display. The individual sensors may be displayed one after another or the sensor measuring the highest concentration is displayed.
- The integrated timer may be used for a possible periodical switching of the relays.
- Different groups/ zones may be programmed.
- The control unit may be mounted in the control cabinet or directly at the wall.
- The integrated memory function records alarm events and faults.
- The integrated interface is for recording measuring data via computer.
- The CANline BUS gas monitoring solution is extremely cost competitive
- The system has been developed by KIMESSA AG and is manufactured in Switzerland.



Inside View

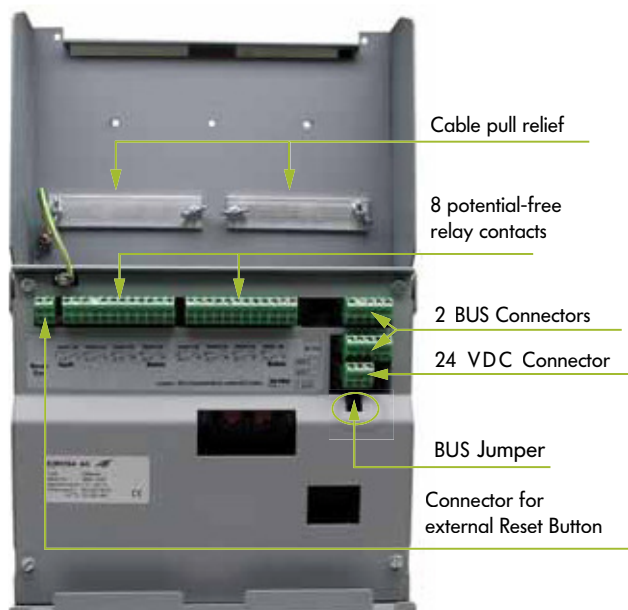

Specifications

Operating voltage	20...26 VDC
Emergency power supply	24 VDC
Power consumption	60 mA
Relay contacts	8 potential free 2A 230VAC
Dimensions	H 218 x W 230 x D 63 x mm
Weight	2'700 gr.

Bus-Gas Detector KSEC 504 for detection of Carbon Monoxide CO

Performance Characteristics

Measuring range:	max. 1000 ppm / linear
Standard calibration:	0...250 ppm / 300 ppm
Response time t_{90} :	max. 50 sec
Operating temperature:	-10 °C ... +50 °C
Start up after reconditioning:	max. 1 h
Pressure range:	atmospheric \pm 10%
Air humidity:	15...90% non condensing
Position sensitivity:	none
Long term output drift:	< 5% / year
Life span at 20 °C:	at least 6 years

Sensor electronic specifications

Cable:	4-core cable, shielded
Power supply:	13.5...30 VDC
Sensor current:	max. 60 mA
Output signal:	digital BUS-signal
Operating temperature:	-40 °C ... +85 °C


Inspection (Maintenance)

The sensor and the electronic require an inspection.
Routine calibration is recommended once or twice a year.


Cross sensitivity to other gases

Test gas	Concentration of the Test gas	Display CO-Sensor
Carbon Dioxide CO ₂	5000 ppm	0 ppm
Nitrogen Dioxide NO ₂	50 ppm	-1 ppm
Nitric Oxide NO	50 ppm	8 ppm
Hydrogen H ₂	100 ppm	20 ppm

Dimensions

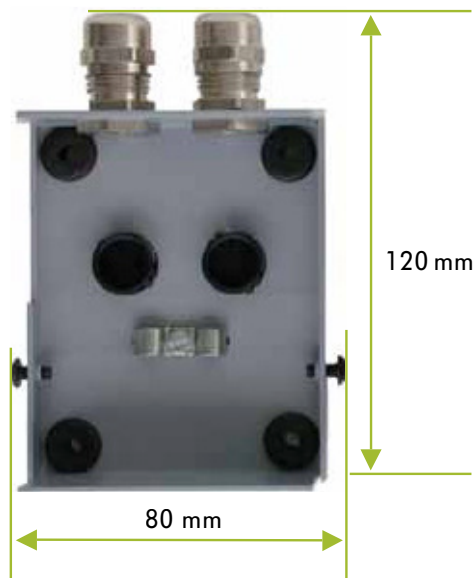

Side view

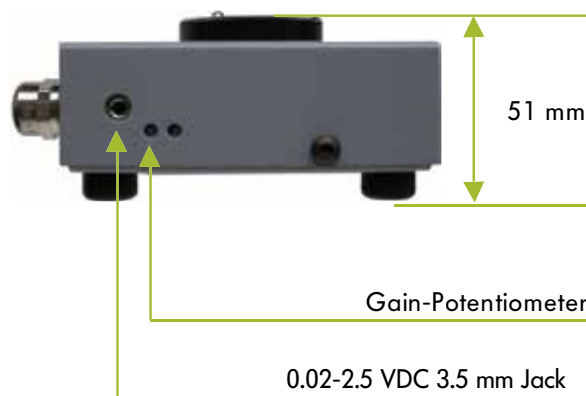

Electronic





CANline Display

- The CANline Display is used for displaying the physical values measured.
- Several displays may be connected to the CAN BUS.
- Different groups / zones can be programmed.
- Each sensor may be allocated an individual name.
- The display may be mounted in the control cabinet, at the control cabinet door or directly at the wall.

Inside view



↑ connector plug

↑ cable inlets

Features

- Display of sensors (numerically or alpha-numerically) and measured concentrations
- Display of the 4 threshold values when exceeded

Housing base



↑ cable clamp

Specifications

Operating voltage	20...26 VDC
Emergency power supply	24 VDC
Power consumption	60 mA
Dimensions	D 38 x H 55 x W 135 mm
Weight	400 gr.

CANline Relay Card


- The CANline Relay Card is used for controlling peripheral devices like fans, alarm displays, signal horns, flasher lamps, gas valves etc.
- The individual relays may be programmed in several modes; e.g. pulsing, manually resetting etc.
- The relay card(s) is merged like a sensor or a display where always desired into the CAN network.
- Up to 6 relay card may be connected to one CAN Bus.
- The relays are protected by fuses from external overload.
- The relay card is preferably mounted in the control cabinet together with the CAN network power supply.

Features

- 4 potential free relays contacts per card 2A 230VAC
- LED indicates active relay
- Overload fuse protection for each relay
- Maximum of 6 relay cards per CAN-Bus
- DIN rail-mounting

Specifications

Operating voltage	20...26 VDC
Emergency power supply	24 VDC
Power consumption	25 mA
Dimensions	D 50 x H 87 x W 120 mm
Weight	220 gr.

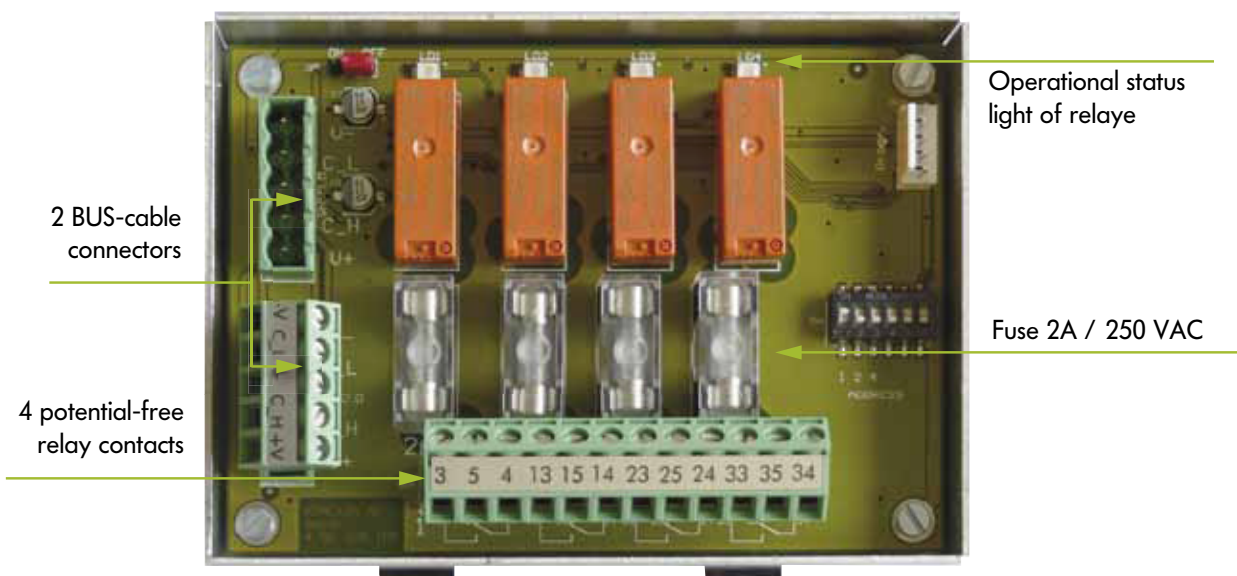

Gas monitoring systems of the fine kind for other applications

(mainly products of ATEX-Category 2G and 3G for Zone 1 and 2)



■ Gas monitoring in laboratories

Typical Gases: O₂, CO₂, H₂, CH₄, C₃H₈



■ Gas monitoring in sewage treatment plants

Typical Gases: CH₄, CO, C₃H₈



■ Gas monitoring in sewage treatment plants

Typical Gases: NH₃, O₂, CH₄, H₂S



■ Gas monitoring in chemical industry

Typical: solvents, O₂, varnishes, etc.

Also:

- personnel safety
- energy plant rooms
- food production
- beverage production
- paper production
- loading platforms
- petrochemical plants
- chemical industry
- pharmaceutical plants
- refrigeration plants

References (Samples)



Airport Zuerich/Switzerland
30 CO-Detectors



Laois Train Depot in Portlaoise, Ireland
21 CO, 5 CH₄-Detectors




Einstein Congress St. Gallen/Switzerland
22 CO/NO₂, 2 Freon, 2 CH₄-Detectors



Elysian Building, Cork City/Ireland
48 CO-Detectors




Roche Basel/Switzerland
78 CO-Detectors

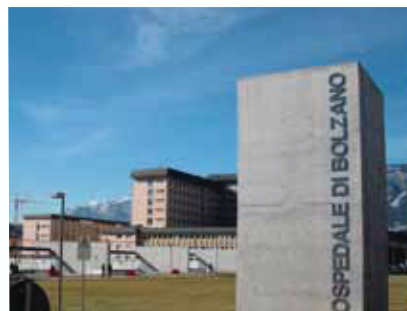

Hospital Bolzano/Italy
64 CO, 64 LPG-Detectors



The Hemisphere, Birmingham/UK
18 CO-Detectors

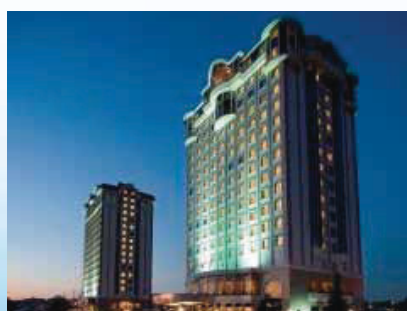

WOW Airport Hotel Istanbul/Turkey
55 CO-Detectors

ISO-Certification



THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE

IQNet and SQS
hereby certify that the organization

KIMESSA AG
CH-8047 Zürich

Certified area

Ganzes Unternehmen

Field of activity

Gaswarnanlagen, Analysen- und Regeltechnik

has implemented and maintains a
Management System
which fulfills the requirements of the following standards

ISO 9001:2000

Scope Nos: 18, 19
issued on: 2007-07-12
Validity date: 2010-07-11
Registration Number: **CH-30061**




René Waxner

President of IQNet

Theodor Zahner

Managing Director SQS



*IQNet Partners**

AENOR Spain AFAQ AFNOR France AIB-Vinçotte International Belgium ANCE Mexico APCTE Portugal CISO Italy CQC China
CQM China CQS Czech Republic Cas Cert Croatia DQS Germany DS Denmark ELOT Greece FCAV Brazil
FONDONORMA Venezuela HKQAA Hong Kong China ICONTEC Colombia IMNC Mexico Inspecta Certification Finland
IRAM Argentina IQA Japan KQF Korea MSZT Hungary Nemko AS Norway NSAI Ireland PCBC Poland QMI Canada
Quality Austria Austria RE Ratna SAI Global Australia SII Israel SHQ Slovenia SIRM GAS International Malaysia
SQS Switzerland SRAC Romania TEST St Petersburg Russia VTQS Serbia

IQNet is represented in the USA by: AFAQ AFNOR, AIB-Vinçotte International, CISO, DQS, NSAI Inc., QMI and SAI Global

* The list of IQNet partners is valid at the time of issue of this certificate. Updated information is available under www.iqnet-certification.com